





PPRV-05

02

A
T
T
A
P
P
A

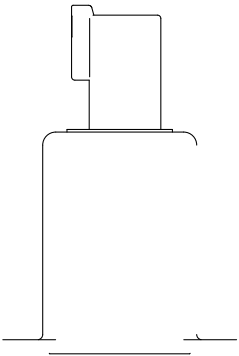

T
P
A
A
T
P
A
T
P
A



T

•
•
•

	0.235Kg
MTTF _d	150
	-30~80


	P _p = 60bar		
	P _T = 30bar		
	P _A = 32bar		
	PWM	180Hz	<4%
		NAS1638 9	ISO4406 20/18/15
	DIN 51524		
	-30~105		
	< 70mL/min		
	< 300mL/min		
	140µm P		

	12 V	24 V	24 V
	1500mA	1300mA	750mA
20	4.8 Ω	9 Ω	24 Ω
	PWM 130-200Hz		
	DT04-2P Deutsch		
	IP6K6/IPX9K		
	<40ms		
	<40ms		

02


P-I

PPRV-05-L

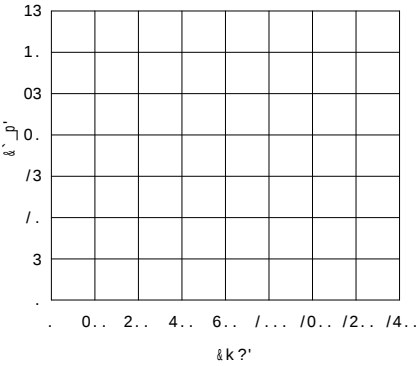


P-I


PPRV-05-S

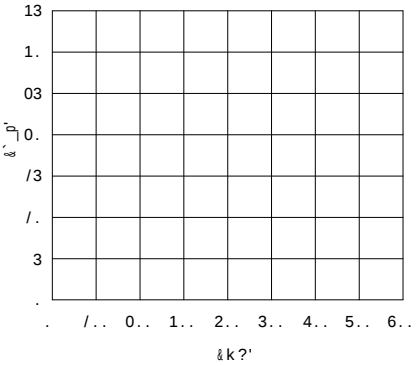

P → A

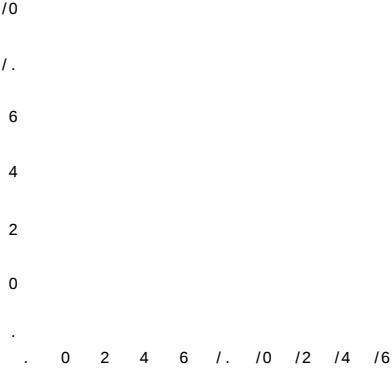

A → T

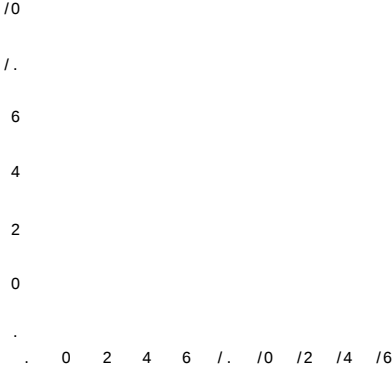

1

2

3

4

5
6
7

8
9

10
11

02

